

HI-FLO AUTO IGNITION REMOTE ENABLE CONTROL KIT


Fitting Instructions

Hiflo Range Water Heaters




DANGER: Isolate power to appliance before carrying out any electrical work

1. Remove screw from front of control panel enclosure and carefully pull the top of cover downwards, until it is fully opened (see photos below)

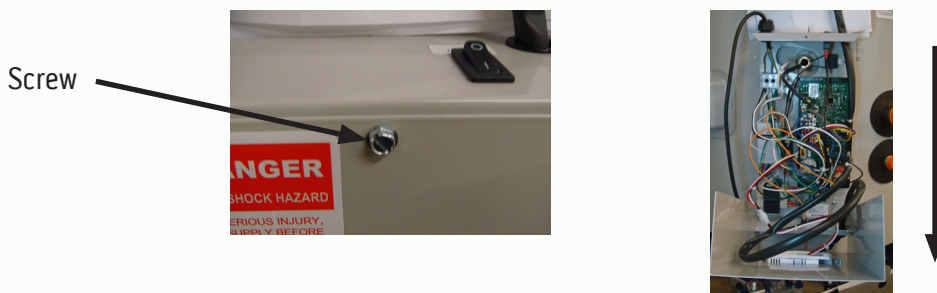


2. Clean the painted metal surface (so that it is free from grease and dust) and place the "Enable" sticker onto the bottom of the panel (see photo below).



3. Peel off one side of a sticky fixer and stick it over the terminal block symbol on the "Enable" label (see photo below)





4. Whilst applying pressure to the two locking tabs, gently pull off the 9 way connector from the honeywell control PCB (see photo below)

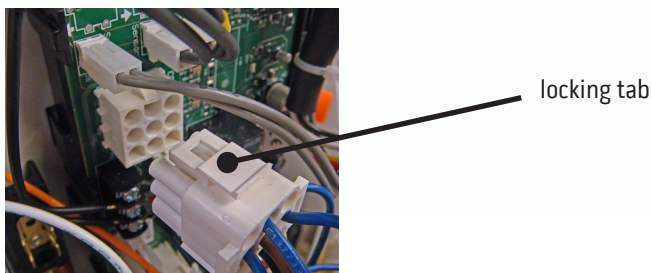


Please read and understand these instructions before commencing installation and leave this manual with the customer for future reference

Andrews. Built to perform.

5. Plug the new loom from this kit, into the honeywell control PCB and plug the original wiring connector into the new loom (see photos below)

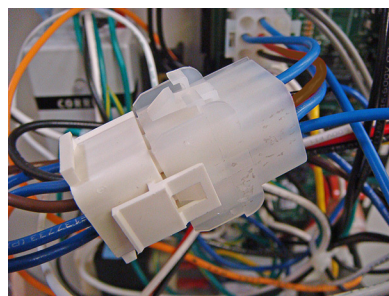

6. Peel off the backing from the sticker fixer and place the terminal block onto the fixer, pushing firmly down to ensure good adhesion. Remove the plastic grommet from the base of the enclosure and fit the supplied cable gland into the hole and secure with locknut (see photo below)

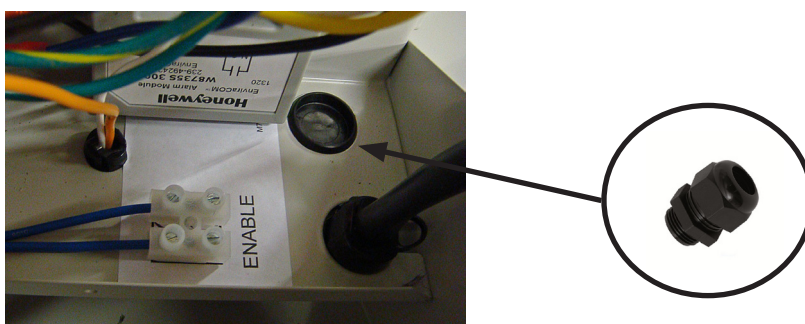

7. Carefully replace cover and secure with screw. The fitting of this kit is complete.

November 2016


Customer support
Monday - Friday
8am - 5pm

Sales
0345 070 1055

Technical
0345 070 1057

Website
andrewswaterheaters.co.uk

Twitter
@AndrewsWH



RS 33961

